


MODULAR OUTDOOR DOWN DISCHARGE ELECTRIC HEATER WITH LPD EVAPORATIVE COOLER AND SCREEN INTAKE

REV A3 01/09/2012

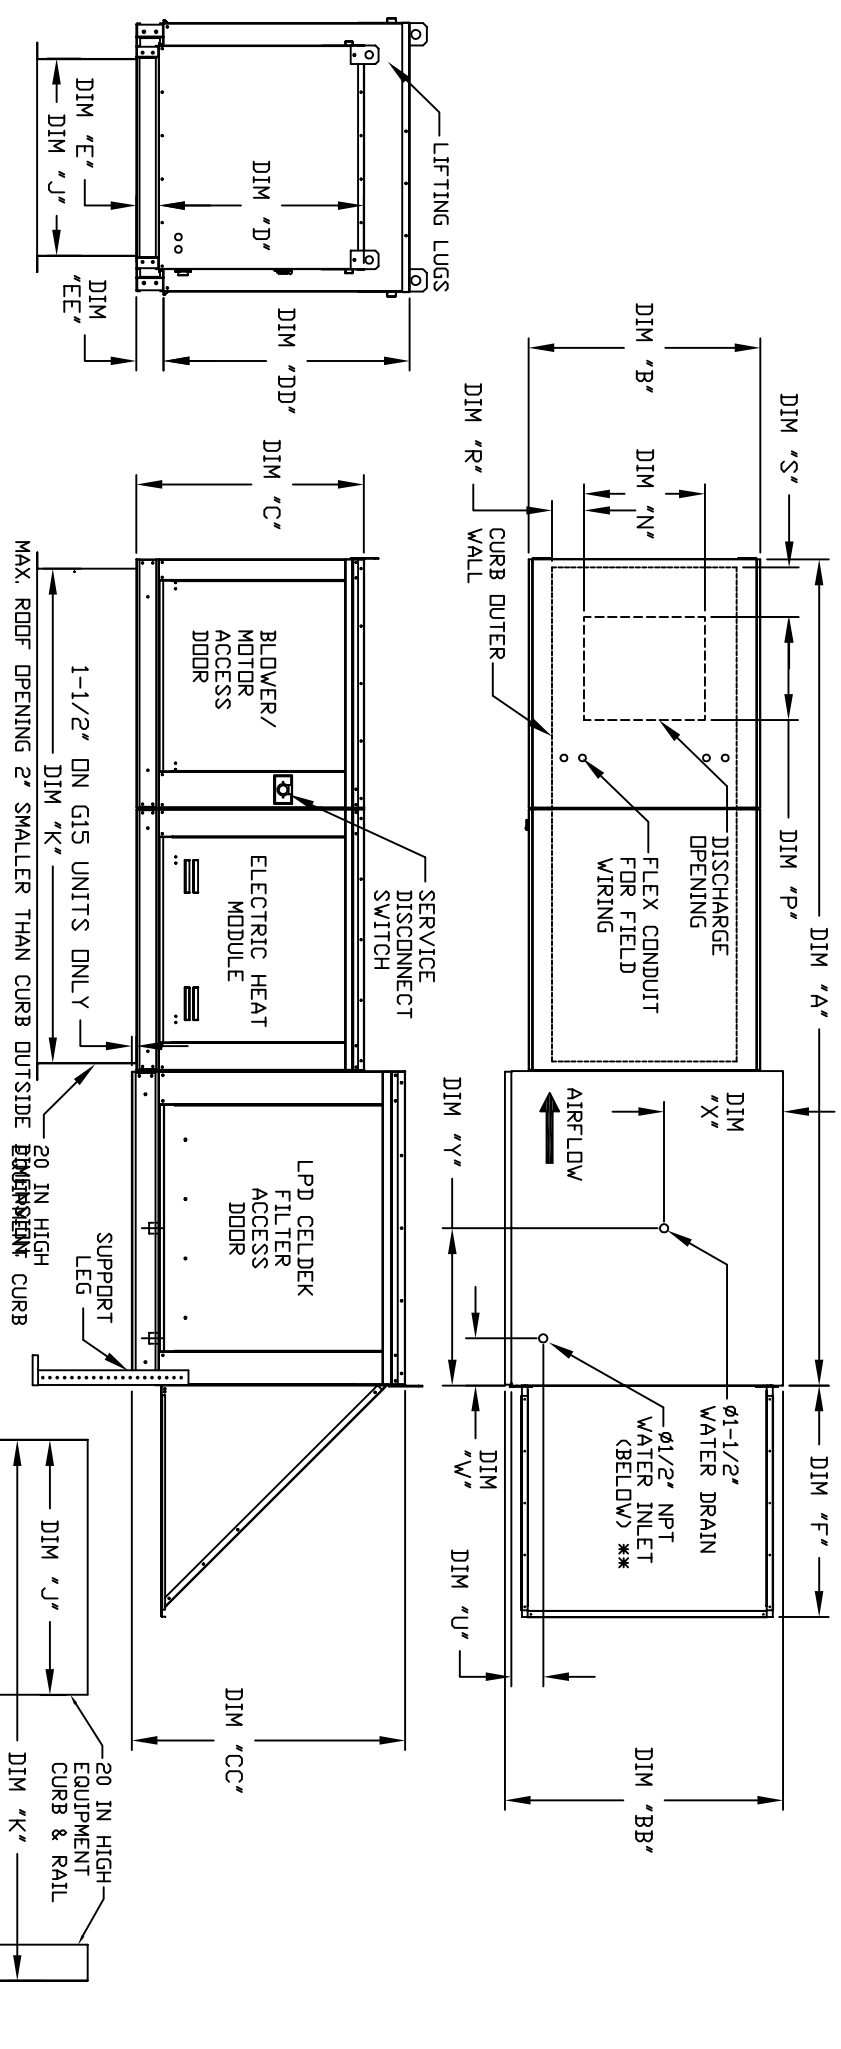

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

MODEL	UNIT DIMENSIONS															
	A	B	BB	C	CC	D	DD	E	EE	F	J	K	N	P	R	S
E1-G10	106-3/8	27-3/8	36-3/4	29-3/4	36-3/4	26-1/16	33	3-3/4	3-3/4	30-5/16	21	71	13-1/4	11-1/2	3-7/8	5-9/16
E2-G15	120-3/8	37-3/8	40-3/4	36-3/4	43-3/8	33-1/16	38-1/8	3-3/4	3-3/4	34-3/16	31	79	18-3/4	16	6-1/8	8-5/16
E3-G18	122-1/2	41-3/8	47-7/8	43-3/8	51-3/8	38-1/16	46-1/8	5-1/4	5-1/4	47-1/4	35	84	22	19	6-1/2	10-5/16
E4-920	153-5/8	48-7/16	58-5/8	51-3/8	58-3/8	46-1/8	53-1/8	5-1/4	5-1/4	49-5/8	42	115-3/16	24-7/8	24-7/8	8-9/16	10-5/8

UNIT INFORMATION

TOT. WEIGHT	CELDEK EVAPORATIVE COOLING UNIT				WATER INLET				DRAIN OPENING			
	MEDIA SIZE & QTY	VEL. @ MAX. CFM	NOZZLES	MAX. FLOW RATE	U	W	X	Y	U	W	X	Y
795 LBS	25"x32"x12"	648 FPM	20	6.5 GPH	4-1/2	6-1/4	18	16	4-1/2	5-3/4	20	19
1020 LBS	30"x36"x12"	867 FPM	28	8.4 GPH	4-1/2	5-3/4	20	19	4-1/2	5-3/4	23-1/2	17-1/2
1285 LBS	38"x43"x12"	705 FPM	35	10.15 GPH	4-1/2	5-3/4	28-7/8	17-1/2	4-1/2	5-3/4	28-7/8	17-1/2
1945 LBS	45"x54"x12"	770 FPM	42	12.6 GPH	4-1/2	5-3/4	28-7/8	17-1/2	4-1/2	5-3/4	28-7/8	17-1/2