


## R1-E.355-G10D Performance Curves

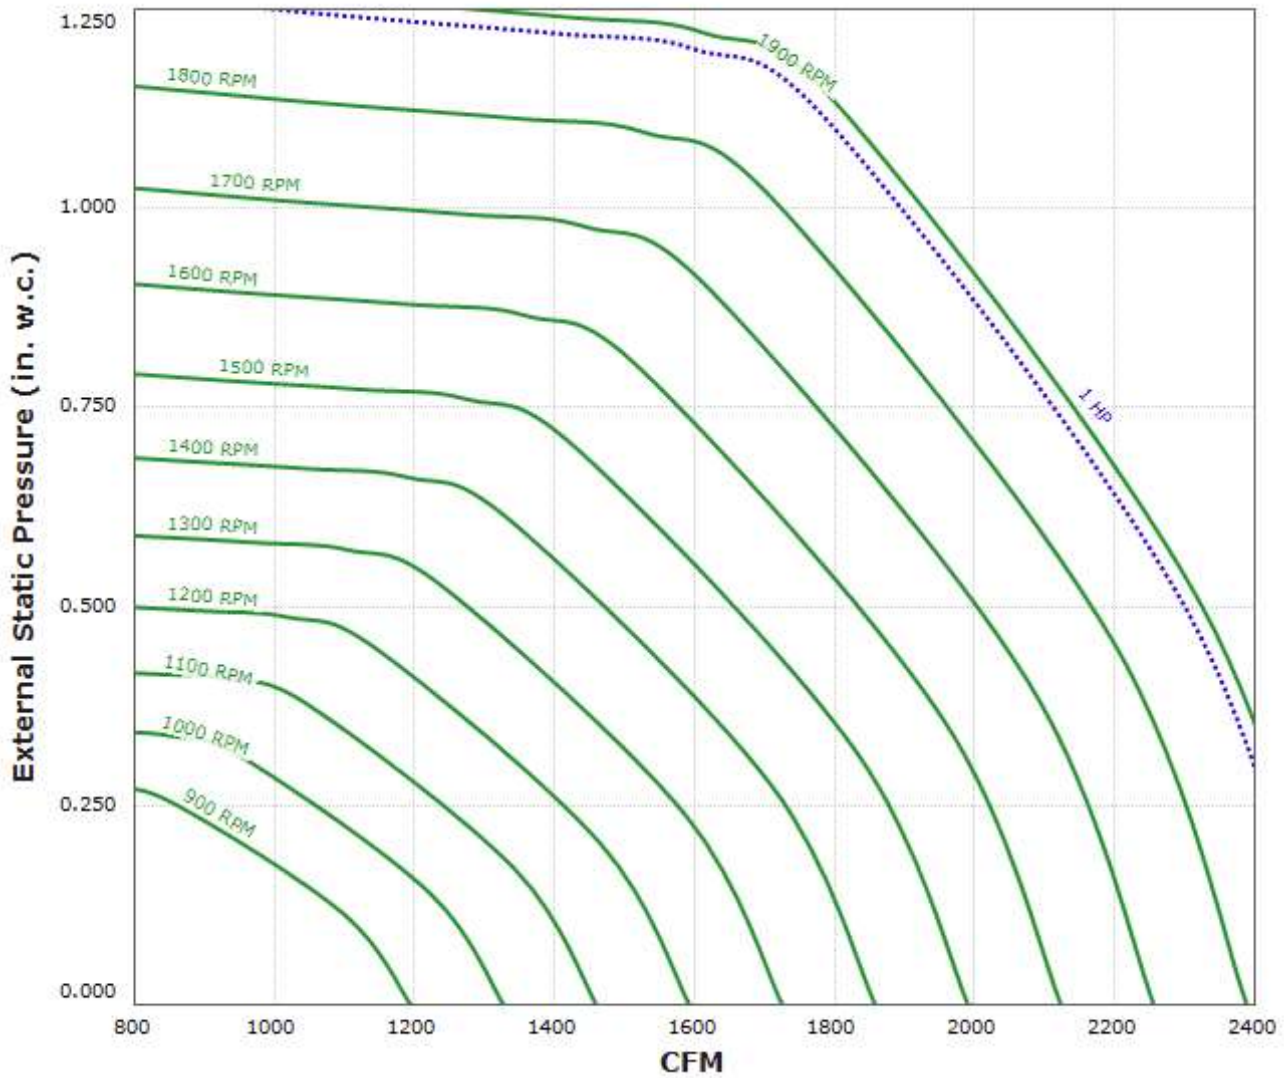

**Max Sizeable RPM = 1884 RPM. Curve shown extended beyond this point for reference only.**

Motor BMN48-750I2-50-230/277 has an rpm range of 900 to 1800.


Motor BMN48-750I2-60-230/277 has an rpm range of 900 to 1800.

Motor M055PWCUK0315-ECM-50-115 has an rpm range of 900 to 1800.

Motor M055PWCUK0315-ECM-50-230 has an rpm range of 900 to 1800.

Motor M055PWCUK0315-ECM-60-115 has an rpm range of 900 to 1800.

Motor M055PWCUK0315-ECM-60-230 has an rpm range of 900 to 1800.

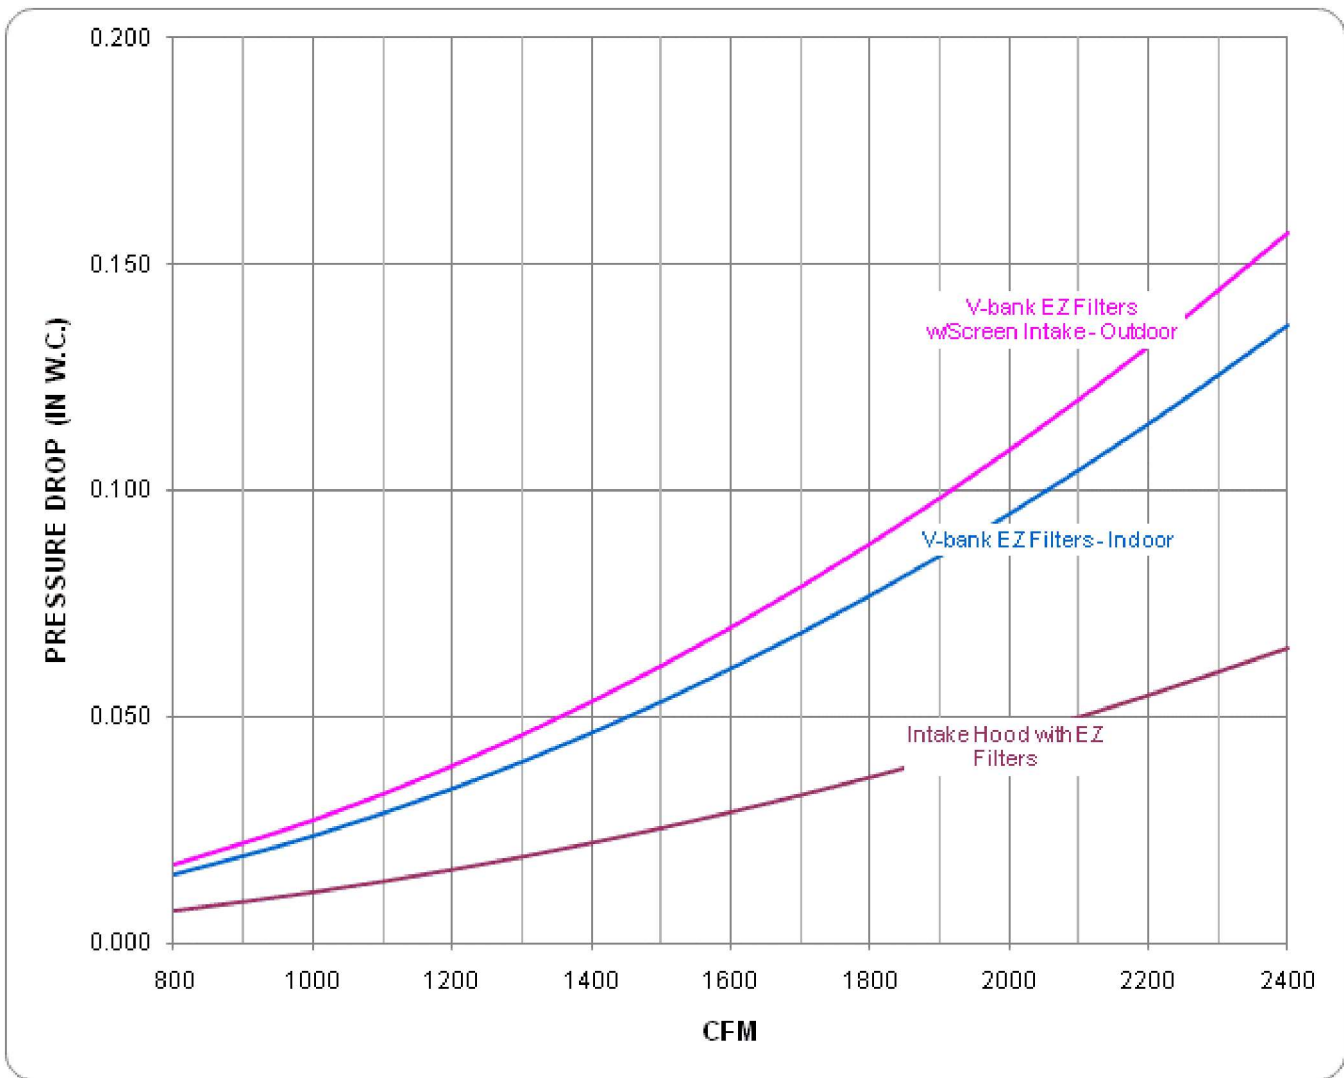

**Notes:**

The static pressure of non-woven polyester filters is 2 times the static pressure of standard EZ Kleen Filters.  
 The static pressure of throw-away filters is 1.33 times the static pressure of standard EZ Kleen Filters.  
 The static pressure of throw-away MERV 13 filters is 1.9 times the static pressure of standard EZ Kleen Filters.  
 Throw-away filters are used in v-bank intakes only.

