



CASING	A	B	C	D	E	F	G	H	J	K	L	M	N	P	S	T	W	X	Y	Z	AA	BB	CC	DD	EE	FF	GG	HH	JJ	KK	LL	F.A. FILTER CAPACITY	R.A. FILTER CAPACITY
222	100	146	50	50	50	1,25	47.38	1.25	143.38	8.75	27.25	14.75	77.00	27.00	43.25	142.5	32	-	27.75	77.25	27.25	10	24	13.75	3.75	123.75	1	14	124	142.5	43.25	(16)20"x25"&(16)16"x25"	(16)20"x25"&(16)16"x25"
225	100	146	50	50	50	1,25	47.38	1.25	143.38	3.5	31.5	14.75	88.00	31.50	43.25	142.5	32	-	31.75	88.25	31.75	10	24	13.75	3.75	123.75	1	14	124	142.5	43.25	(16)20"x25"&(16)16"x25"	(16)20"x25"&(16)16"x25"
227	110	156	60	50	60	1.75	56.5	1.75	152.5	8.5	34.5	16.25	96	34.5	53.25	151.5	32	-	34.75	96.25	34.75	10	24	15.75	1.75	133.5	1.75	15.75	133.75	151.5	53.25	(30)20"x25"&(10)16"x25"	(30)20"x25"&(10)16"x25"
230	110	156	60	50	60	1.75	56.5	1.75	152.5	4.25	37	16.25	104	37	53.25	151.5	32	-	37.25	104.25	37.25	10	24	15.75	1.75	133.5	1.75	15.75	133.75	151.5	53.25	(30)20"x25"&(10)16"x25"	(30)20"x25"&(10)16"x25"
233	128	191	70	58	70	1.75	66.5	1.75	187.5	10.5	43.25	19.75	116	39.81	63.63	186.13	32	-	43.50	116.25	40.06	10	24	21.25	5.75	157.75	6.68	21.5	158	186.25	65.75	(20) 16x25, (30) 20x25	(20) 16x25, (30) 20x25
236	128	191	70	58	70	1.75	66.5	1.75	187.5	10.5	43.25	19.75	122	42.81	63.63	186.13	32	-	43.50	122.25	43.06	10	24	21.25	5.75	157.75	6.68	21.5	158	186.25	65.75	(20) 16x25, (30) 20x25	(20) 16x25, (30) 20x25

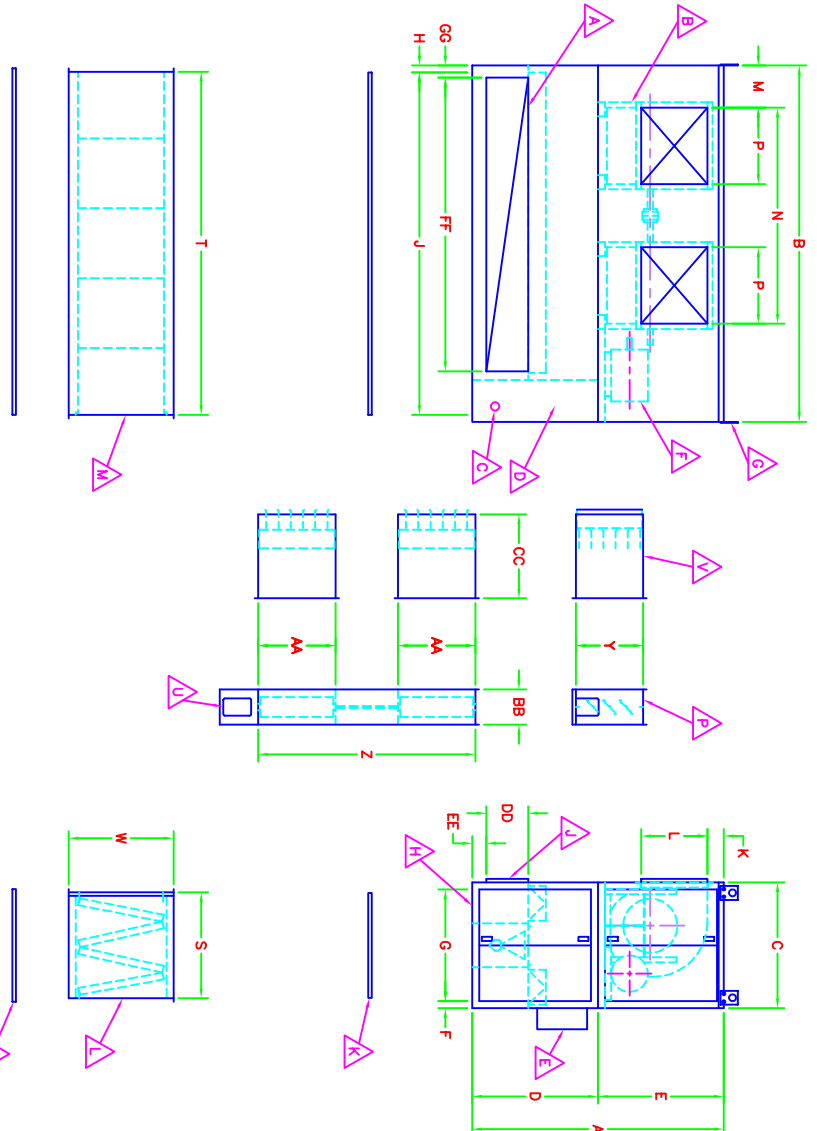

- ▲ A 80/20 BURNER PROFILE
- ▲ B THIN FC DWDI BLOWERS
- ▲ C GAS CONNECTION
- ▲ D ELEC./MANIFOLD CONTROLS VESTIBULE
- ▲ E MAIN DISCONNECT SWITCH
- ▲ F SUPPLY FAN BLOWER MOTOR
- ▲ G REMOVABLE LIFTING LUG
- ▲ H FRESH AIR INTAKE OPENING
- ▲ J RETURN AIR INTAKE OPENING
- ▲ K FRESH AIR OPENING INLET SCREEN
- ▲ L FRESH AIR INTAKE FILTER
- ▲ M FRESH AIR INTAKE FILTER SERVICE DOOR
- ▲ P DISCHARGE DAMPER
- ▲ R FRESH AIR FILTER INLET SCREEN
- ▲ S RETURN AIR FILTER
- ▲ T RETURN AIR FILTER INTAKE SCREEN
- ▲ U DAMPER MOTOR
- ▲ V DISCHARGE DIFFUSER

NOTES:
 -1"CONNECTION FLANGES SUPPLIED AROUND ALL OPENINGS
 -REPAIR ACCESS DOORS PROVIDED ON ALL SPILT MODELS
 -EQUIPMENT SUPPORT RECOMMENDED UNDER RETURN AIR INTAKE FILTER
 -SERVICE DOORS SUPPLIED ON BOTH SIDES OF FILTER SECTION ON MODELS 233 & 236
 -EQUIPMENT SUPPORT RECOMMENDED UNDER RETURN AIR INTAKE FILTER
 -DISCHARGE DIFFUSER SUPPLIED WITH ADJUSTABLE BLADES

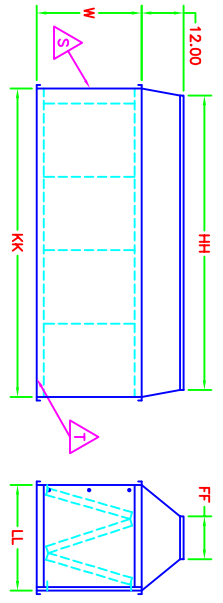

30110083

DRAWN BY: TKL
 DATE: 02/10/00
 APPROVED BY: _____
 DATE: _____

REVISIONS

REV	TITLE

CFAM-222 THRU 236
 ARRANGEMENT V3 SIDE DISCHARGE

MATERIAL: _____
 SCALE: 1 to 1

ECN NO: _____ DWG: _____ DATE: _____

TOLERANCES
 2 PLCS ±.03
 4 PLCS ±.015

FIGURE NUMBER: C800010C

DO NOT SCALE DRAWING USE DIMENSIONS SHOWN
 ALL DIMENSIONS ARE TO INCLUDE UNLESS OTHERWISE SPECIFIED