


DR12HRA Performance Curve

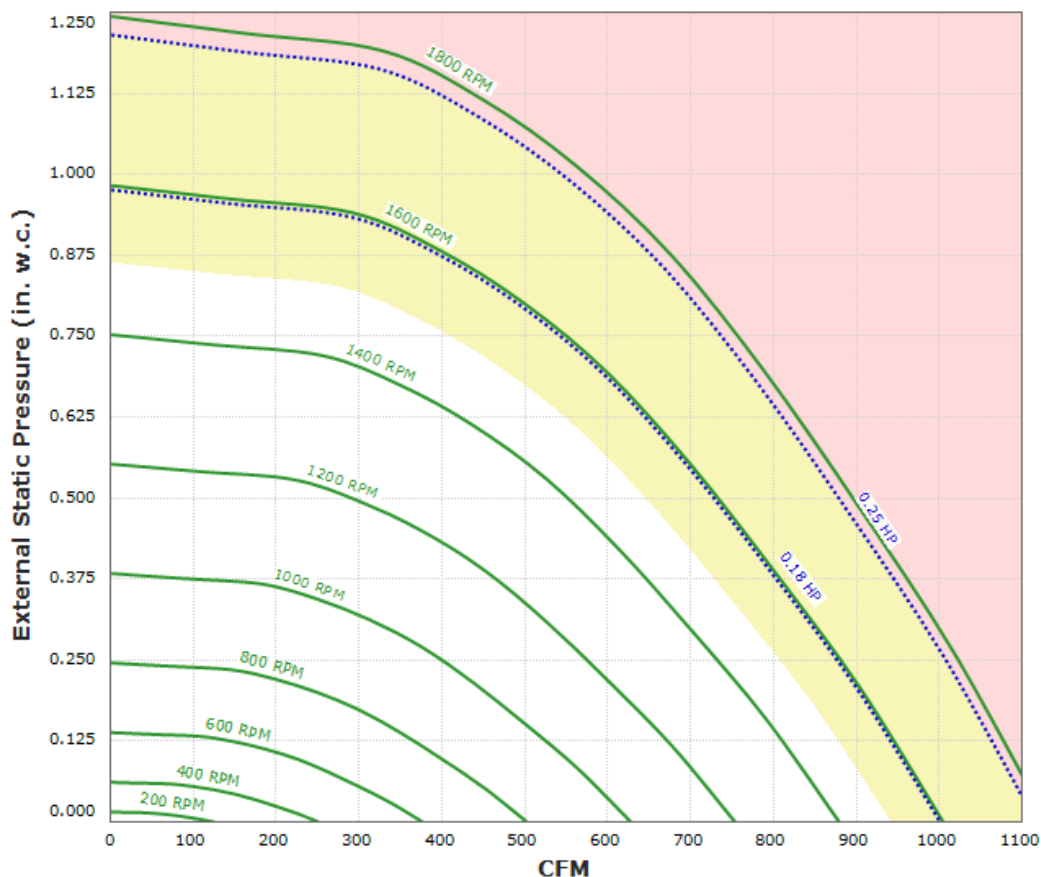

Max Sizeable RPM = 1800 RPM. Curve shown extended beyond this point for reference only.

- Motor BMN42-18011-50-115 has an rpm range of 350 to 1800.
- Motor BMN42-18011-60-115 has an rpm range of 350 to 1800.
- Motor BMN42-18012-50-230/277 has an rpm range of 350 to 1800.
- Motor BMN42-18012-60-230/277 has an rpm range of 350 to 1800.
- Motor CK42BS04M01-50-115 has an rpm range of 1100 to 1400.
- Motor CK42BS04M01-50-230 has an rpm range of 1100 to 1400.
- Motor CK42BS04M01-60-115 has an rpm range of 1125 to 1620.
- Motor CK42BS04M01-60-230 has an rpm range of 1125 to 1620.
- Motor CK42BS04M02-50-115 has an rpm range of 1240 to 1400.
- Motor CK42BS04M02-50-230 has an rpm range of 1100 to 1400.
- Motor CK42BS04M02-60-115 has an rpm range of 1250 to 1625.
- Motor CK42BS04M02-60-230 has an rpm range of 1130 to 1625.
- Motor M47PWAAD-ECM-50-115 has an rpm range of 350 to 1800.
- Motor M47PWAAD-ECM-60-115 has an rpm range of 350 to 1800.

Performance shown is certified for Installation Type A: Free inlet, Free outlet. Speed shown is nominal. Performance is based on actual speed of test. Performance ratings do not include the effects of appurtenances (accessories).

Catalog #113R
October 2019