


RABI18DD-RM Performance Curve

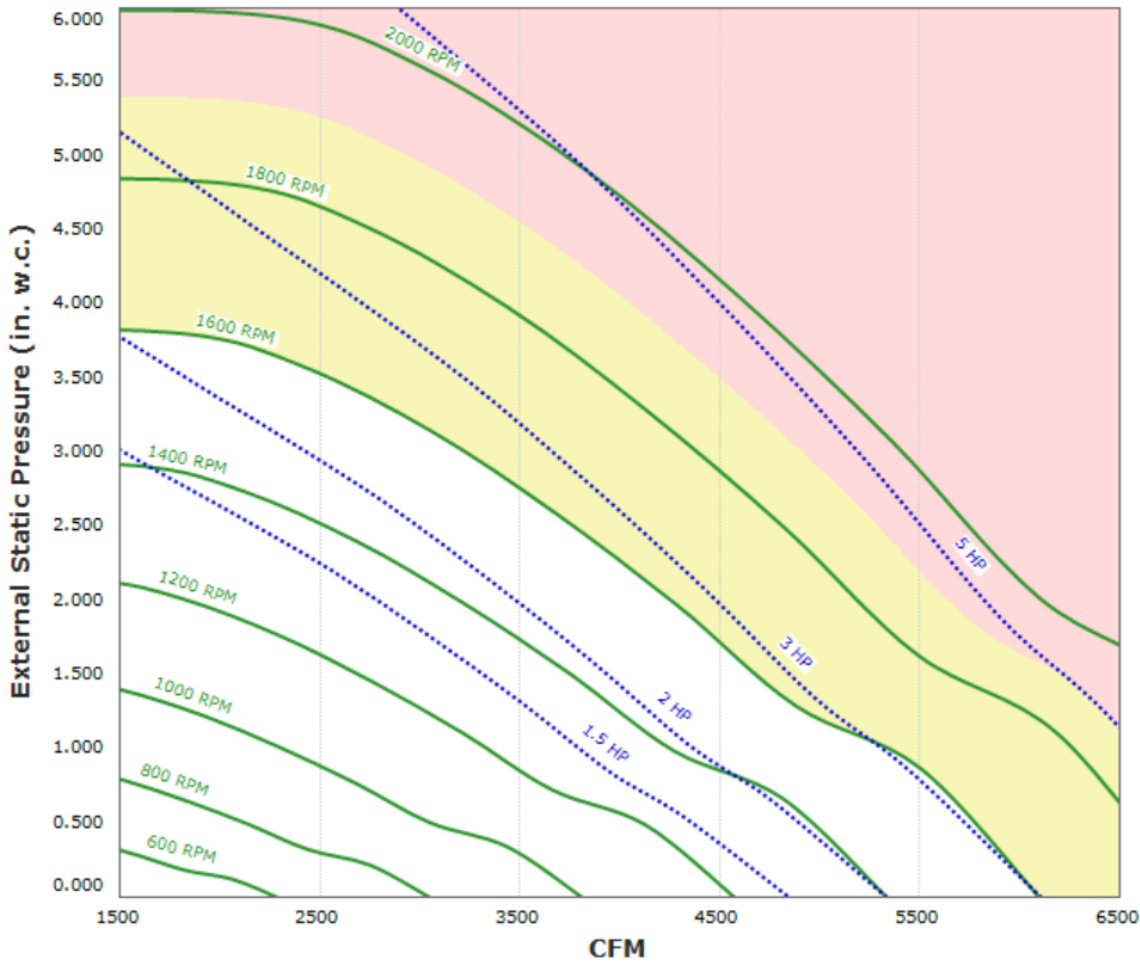

Max Sizeable RPM = 1900 RPM. Curve shown extended beyond this point for reference only.

Max discharge velocity for restaurant applications is 1800 rpm. This equates to 3512 cfm.

- Motor 00152ET3H182T-W22 has an rpm range of 600 to 1150.
- Motor 00212ET3E184T-W22 has an rpm range of 600 to 1150.
- Motor 00212ET3H184T-W22 has an rpm range of 600 to 1150.
- Motor 00212OT3H184T-S has an rpm range of 600 to 1150.
- Motor 00218ET3H145T-W22 has an rpm range of 600 to 1750.
- Motor 00218OT3H145T-S has an rpm range of 600 to 1750.
- Motor 00318ET3H182T-W22 has an rpm range of 600 to 1750.
- Motor 00318OT3H182T-S has an rpm range of 600 to 1750.
- Motor 00518ET3H184T-W22 has an rpm range of 600 to 1750.
- Motor 00518OT3H184T-S has an rpm range of 600 to 1750.
- Motor BMN145-2.0I2-CS-UB1-50 (1200RPM) has an rpm range of 600 to 1200.
- Motor BMN145-2.0I2-CS-UB1-60 (1200RPM) has an rpm range of 600 to 1200.
- Motor BMN145-2.0I2-ES-UB1-50 (1800RPM) has an rpm range of 600 to 1800.
- Motor BMN145-2.0I2-ES-UB1-60 (1800RPM) has an rpm range of 600 to 1800.
- Motor DHP0026 has an rpm range of 600 to 1150.
- Motor DHP0034 has an rpm range of 600 to 1750.
- Motor DTP0024 has an rpm range of 600 to 1740.
- Motor DTP0024-50HZ has an rpm range of 600 to 1415.
- Motor DTP0026 has an rpm range of 600 to 1150.
- Motor DTP0034 has an rpm range of 600 to 1755.
- Motor DTP0034-50HZ has an rpm range of 600 to 1438.
- Motor DTP0054 has an rpm range of 600 to 1750.
- Motor DTP0054-50 has an rpm range of 600 to 1435.
- Motor DTP1/56 has an rpm range of 600 to 1150.
- Motor GP0024 has an rpm range of 600 to 1740.
- Motor GP0024-50 has an rpm range of 600 to 1440.
- Motor GP0026 has an rpm range of 600 to 1150.
- Motor GP0034 has an rpm range of 600 to 1800.
- Motor GP0034-50 has an rpm range of 600 to 1440.
- Motor GP0054 has an rpm range of 600 to 1800.
- Motor GP0054-50 has an rpm range of 600 to 1440.
- Motor GP1/56 has an rpm range of 600 to 1150.
- Motor NP0024 has an rpm range of 600 to 1740.
- Motor NP0026 has an rpm range of 600 to 1150.
- Motor NP0034 has an rpm range of 600 to 1755.

Performance shown is certified for Installation Type B: Free inlet, Ducted outlet. Performance ratings do not include the effects of appurtenances (accessories). Power rating (BHP) does not include transmission losses.