



MODEL NO	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S	T	U	V	W	X	**FA FILTER QUANTITY	**FA FILTER/HOOD QUANTITY
9	70	46	38	5.5	30	1	39.25	7	18.75	8.5	18.75	30.25	39.5	48	51.66	28	10	19	19	10	24	(4)20"x25"	(4)20"x25"
10	70	46	38	5.5	30	1	39.25	7	18.75	8.5	18.75	30.25	39.5	48	51.66	28	10	19	19	10	24	(4)20"x25"	(4)20"x25"
12	70	46	38	5.5	30	1	39.25	10.5	18.75	8.5	18.75	30.25	39.5	48	51.66	28	10	19	19	10	24	(4)20"x25"	(4)20"x25"
15	70	46	38	5.5	30	1	39.25	10.5	18.75	8.5	18.75	30.25	39.5	48	51.66	28	10	19	19	10	24	(4)20"x25"	(4)20"x25"

- NOTES:
- 1 INCH CONNECTION FLANGE SUPPLIED AROUND FRESH AIR INTAKE OPENING
  - (4) LIFTING LUGS AVAILABLE IN HANGING CONFIGURATION
  - DISCHARGE DIFFUSER SUPPLIED WITH ADJUSTABLE BLADES
  - BURNER PROFILE AVAILABLE IN TWO-SPEED CONFIGURATION
  - BASE DESIGNED FOR FLAT MOUNT OR CURB MOUNT
  - ALL DIMENSIONS ARE SHOWN IN INCHES
  - \*\*FA : FRESH AIR



TYPICAL BASE DETAIL

- A** BURNER PROFILE
- B** FC DWDI BLOWER
- C** LIFT-OFF INTAKE FILTER SERVICE DOOR
- D** DAMPER MOTOR
- E** ELEC/MANIFOLD CONTROLS VESTIBULE
- F** HINGED SERVICE DOOR
- G** MAIN DISCONNECT SWITCH
- H** SUPPLY FAN BLOWER MOTOR
- J** STANDARD FRESH AIR INTAKE HOOD/FILTER COMBINATION (FILTERS SUPPLIED ONLY WHEN ORDERED)
- K** FRESH AIR INTAKE FILTER
- L** FRESH AIR INTAKE DAMPER
- M** FRESH AIR INTAKE OPENING
- N** LIFTING LUG
- P** GAS CONNECTION
- R** DISCHARGE DAMPER
- S** DISCHARGE DIFFUSER
- T** DISCHARGE LOCATOR FLANGE

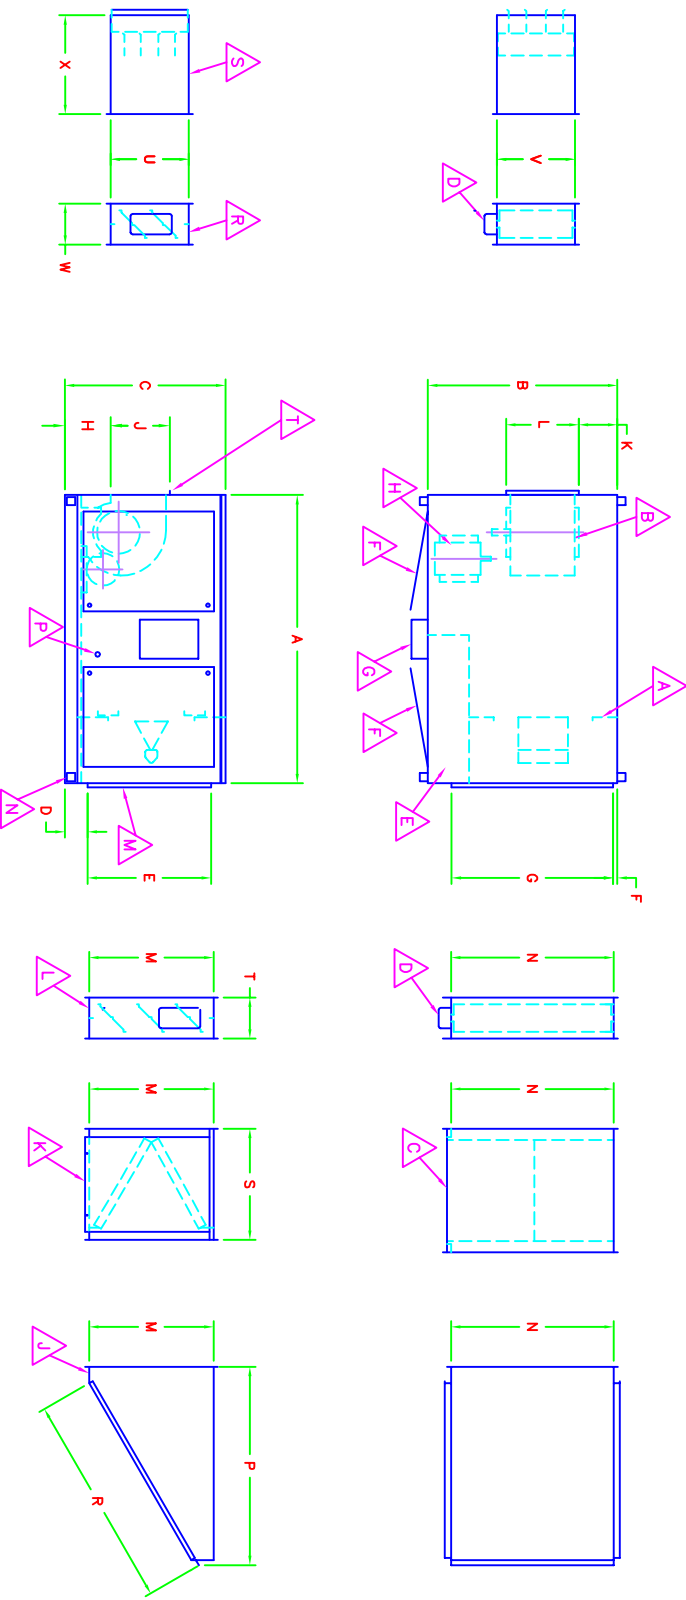

REVISION NUMBER	4	1000040C
DATE		
ECH NO		
DWG		
TOLERANCES	2 PLCS ±.03	3 PLCS ±.015

REV	TITLE	REVISION DESCRIPTION

DRAWN BY  
TKL  
DATE  
02/10/00  
APPROVED BY  
DATE

**RUPP AIR MANAGEMENT SYSTEMS**

MATERIAL

SCALE 1 to 1

DO NOT SCALE DRAWING USE DIMENSIONS SHOWN  
ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED

DRAWING/PART NUMBER  
30400014

RAM-9, 10, 12 AND 15  
ARRANGEMENT H4 HORIZONTAL DISCHARGE