
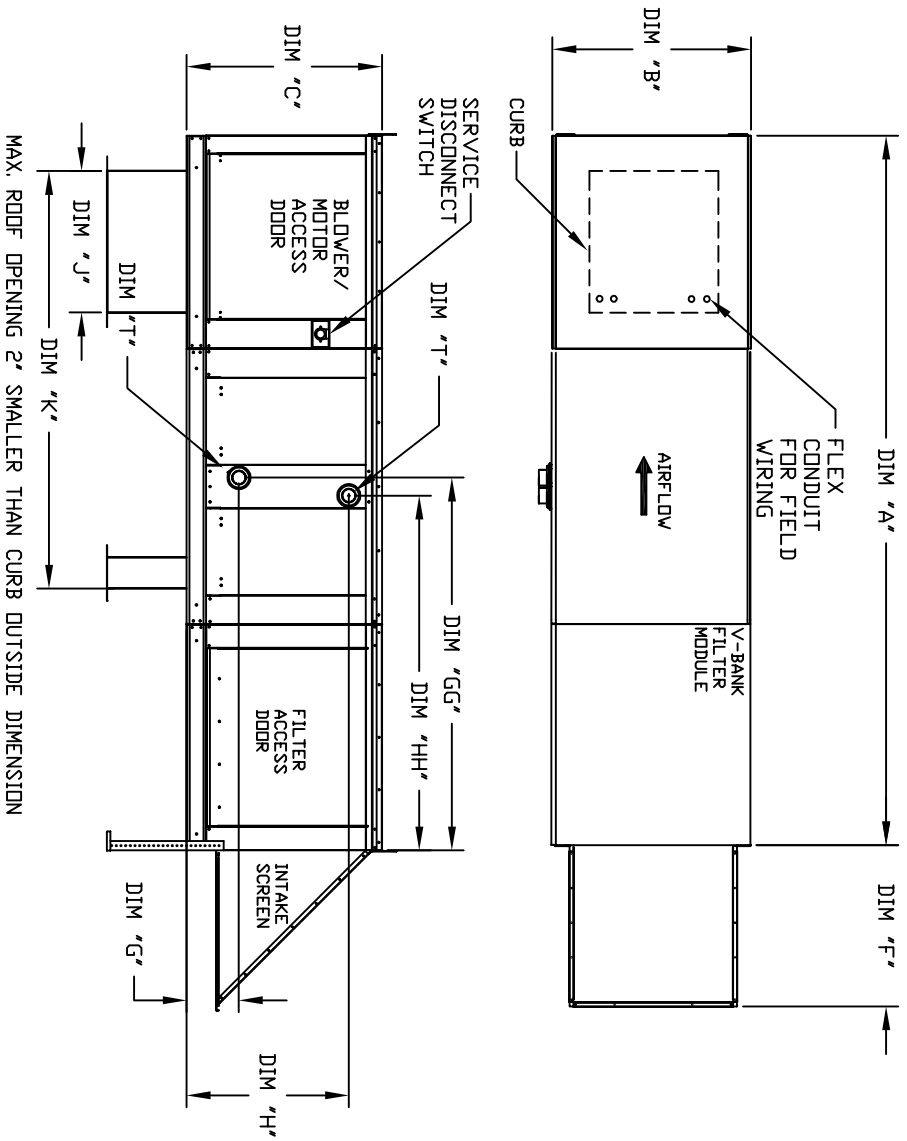


MODULAR OUTDOOR SIDE DISCHARGE BLOWER WITH HEATING COIL, V-BANK FILTER AND SCREEN INTAKE

SYRACSAH
REV# 12/1/2016

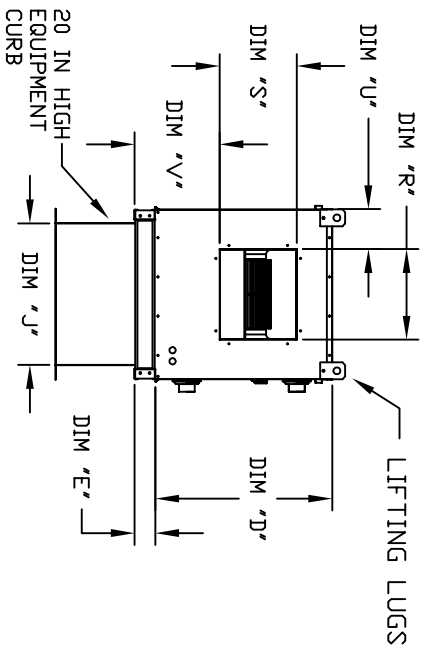

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

UNIT SIZE	UNIT DIMENSIONS												BELT DRIVE DISCHARGE OPENING					DIRECT DRIVE DISCHARGE OPENING					V-BANK FILTER				
	A	B	C	D	E	F	G	H	I	J	K	L	R	S	U	V	R	S	U	V	FILTER SIZE & QTY	MAX. FILTER VELOCITY					
1	106-5/8	27-3/8	29-3/4	26-1/16	3-3/4	22-3/8	21	71	13 1/4	11-1/2	6-3/8	11-7/8	1-1/4	15-1/2	4-3/8	8-15/16	20"x25"x2" (3)	3500 CFM = 406 FPM									
2**	114-5/8	37-3/8	36-3/4	33-1/16	3-3/4	30-5/16	31	79	15-3/4	13-9/16	10-1/8	13-1/16	1-1/4	N/A	N/A	N/A	16"x20"x2" (8)	5000 CFM = 358 FPM									
2	114-5/8	37-3/8	36-3/4	33-1/16	3-3/4	30-5/16	31	79	18-3/4	16	8-5/8	14-1/16	24-3/4	22	5-5/8	10-15/16	16"x20"x2" (8)	6000 CFM = 429 FPM									
3	125-5/8	41-3/8	43-3/8	38-1/16	5-1/4	34-3/16	35	84	19	9	17-1/8	28	25	5-1/16	14-15/16	20"x25"x2" (8)	8000 CFM = 348 FPM										
4	153-7/8	48-7/16	51-3/8	46-1/8	5-1/4	47-1/4	42	115-3/16	24-7/8	24-7/8	11-1/16	19-1/8	30	8-9/16	16-5/8	16"x20"x2" (15)	15000 CFM = 572 FPM										
5	163-7/8	59-3/16	58-3/8	53-1/8	5-1/4	49-1/2	52-3/4	125-3/16	31-3/8	31-3/8	13-3/16	21-9/16	35-3/8	35-3/8	11-1/4	19-10/16	20"x25"x2" (12)	22000 CFM = 638 FPM									

HOT WATER COIL MODULE

UNIT SIZE	WEIGHT	TOTAL CAPACITY	PIPE CONNECTION
1	485 LBS	165.63 (MBH)	2" (MPT)
2**	740 LBS	320.88	2"
2	750 LBS	320.88	2"
3	910 LBS	514.97	1-1/2"
4	1505 LBS	831.87	2-1/2"
5	2060 LBS	1230.16	3"

STEAM COIL MODULE

UNIT SIZE	WEIGHT	TOTAL CAPACITY	PIPE CONNECTION
1	485 LBS	176.49 (MBH)	2-1/2"
2**	740 LBS	328.19	2-1/2"
2	750 LBS	328.19	2-1/2"
3	905 LBS	505.64	2-1/2"
4	1480 LBS	812.24	2-1/2"
5	2055 LBS	1234.45	2-1/2"